

Straight Through, Absorptive Design: Expected Attenuation of High Frequency Noise is 20 dBA

Straight through design with no center panel offers good attenuation of high frequency noise with low pressure drop. Use for small atmospheric vent applications, on blower or compressor intakes and discharges, and as an add-on to boost overall attenuation when installed in series with an M-line chamber type silencer. Choose an FP model for intake service or an FPE for exhaust service.

OVERVIEW

- FEATURES
- Advanced acoustical design
 - Heavy duty, all welded construction and long service life
 - Easily installed in any position
 - Prime coated exterior finish
 - Sizes 1 1/2" to 3 1/2" have MNPT connections



FEATURES

- OPTIONAL ACCESSORIES
- Horizontal or vertical support arrangements
 - Special paint
 - Stainless steel construction

OPTIONAL ACCESSORIES

TYPICAL APPLICATIONS

- Internal combustion engine intakes
- Compressor intakes
- Fan intakes and discharges

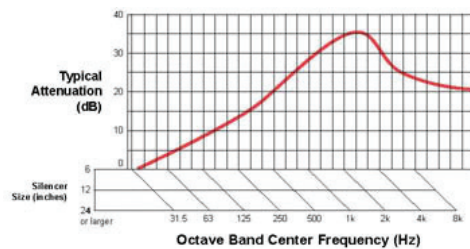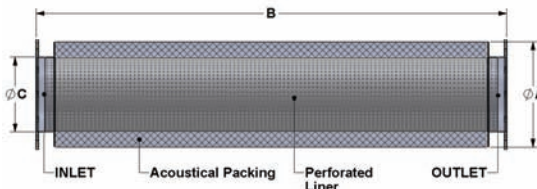

Size	A (FP)	B (FPE)	C	Est. Wt.
1 1/2"	4 3/4	4 3/4	20	8
2"	5	5	24	12
2 1/2"	6	6	26	14
3"	6 1/2	6 1/2	30	20
3 1/2"	7	7	34	28
4"	10	11	38	55
5"	11 1/8	12	42	63
6"	12 1/8	13	48	80
8"	14 1/8	15	54	120
10"	16 1/8	17	67	180
12"	18 1/8	19	79	290
14"	20	20	91	330
16"	22	22	103	440
18"	24	24	116	570
20"	26	26	128	700
22"	28	28	140	820
24"	30	30	152	1100
26"	32	32	164	1370
28"	34	34	176	1560
30"	36	36	188	1770

Note: Dimensions are in inches, weights are in pounds.