

OVERVIEW

Absorptive Design with Internal Center Panel: Expected Attenuation of High Frequency Noise is 20 to 25 dBA

Use for a medium to high degree of high frequency noise attenuation. Choose an FPC model for intake service or an FPCE for exhaust service.

TYPICAL APPLICATIONS



- Internal combustion engine intakes
- Compressor intakes
- Fan intakes and discharges

FEATURES

- Advanced acoustical design
- Heavy duty, all welded construction and long service life
- Easily installed in any position
- Prime coated exterior finish

OPTIONAL ACCESSORIES

- Horizontal or vertical support arrangements
- Special paint
- Stainless steel construction

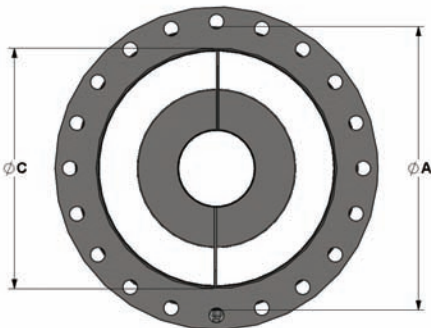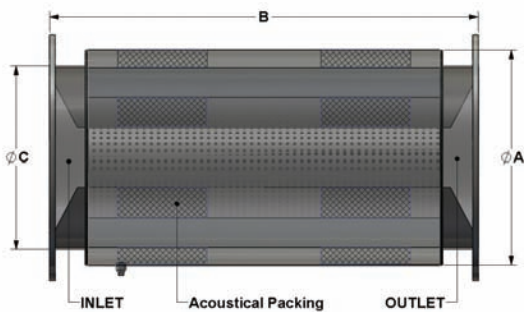

Size	A	B	C	Est. Wt.
14"	18	35	14	200
16"	20	39	16	240
18"	22	44	18	300
20"	24	48	20	360
22"	26	52	22	430
24"	28	56	24	590
26"	30 3/8	60	26	700
28"	32 1/2	64	28	800
30"	35	68	30	900
32"	37 3/8	72	32	1200
34"	39 1/2	76	34	1330
36"	42	80	36	1490

Note: Dimensions are in inches, weights are in pounds.

