

OVERVIEW

### Full Flow Area Absorptive Design with Internal Center Panel: Expected Attenuation of High Frequency Noise is 15 to 30 dBA

Use for a high degree of high frequency noise attenuation. Choose an FPS model for intake service or an FPSE for exhaust service.

TYPICAL APPLICATIONS



- Internal combustion engine intakes
- Compressor intakes and discharges
- Fan intakes and discharges

FEATURES

- Advanced acoustical design
- Heavy duty, all welded construction and long service life
- Easily installed in any position
- Prime coated exterior finish

OPTIONAL ACCESSORIES

- Horizontal or vertical support arrangements
- Special paint
- Stainless steel construction

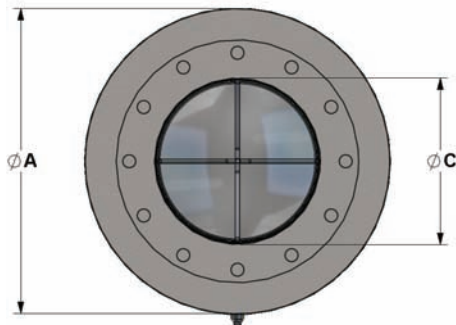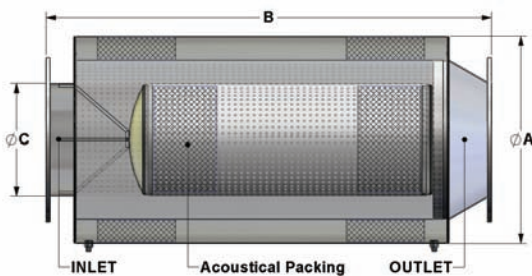

Size	A	B	C	Est. Wt.
6"	14 5/8	27	6	75
8"	18	35	8	130
10"	20 3/4	44	10	190
12"	23 3/8	51	12	270
14"	26 3/8	57	14	370
16"	29 1/8	66	16	490
18"	32 1/8	71	18	565
20"	34 7/8	83	20	820
22"	37 3/4	89	22	1000
24"	40 1/2	98	24	1280
26"	43 3/8	106	26	1530
28"	46 1/4	111	28	1700
30"	49	121	30	1900

Note: Dimensions are in inches, weights are in pounds.

