

**Straight Through Acoustically Packed Silencer for Blower Service:
Expected Attenuation is 15 to 30 dBA**

Use for a high degree of high frequency noise attenuation on blower intakes or discharges. This model is ideal for residential areas where background noise is relatively low.

OVERVIEW

TYPICAL APPLICATIONS



- Rotary positive blower intake and discharge
- Vacuum pump intake and discharge
- Centrifugal blower intake and discharge

FEATURES

- Advanced acoustical design
- High quality sound absorbing material
- Extra-heavy wall, all welded construction
- Prime coated exterior finish
- Sizes 1" through 3 1/2" have MNPT connections

OPTIONAL ACCESSORIES

- Flexible connectors
- Companion flanges
- Horizontal or vertical support arrangements
- Special paint
- Stainless steel construction

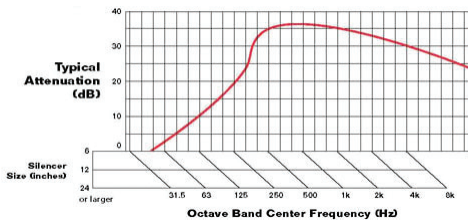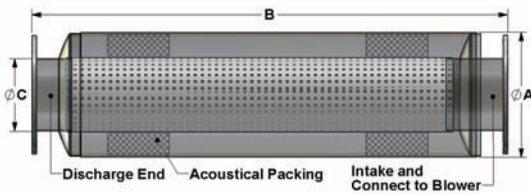

Size	A	B	C	Est Wt.
1"	4 5/8	16	1	10
1 1/2"	4 5/8	20	1 1/2	15
2"	5 3/4	24	2	20
2 1/2"	5 3/4	26	2 1/2	25
3"	7	30	3	40
3 1/2"	7	34	3 1/2	45
4"	10 1/4	38	4	90
5"	12	42	5	120
6"	12	48	6	145
8"	14	54	8	200
10"	16	67	10	315
12"	18	79	12	420
14"	20	91	14	670
16"	22	103	16	840
18"	30	71	18	980
20"	36	83	20	1370
22"	36	89	22	1505
24"	40	98	24	1920
26"	45	106	26	2325
28"	45	111	28	2495
30"	50	121	30	2995

Note: Dimensions are in inches, weights are in pounds.