

**Combination Acoustically Packed and Chamber Type Silencer for Blower Service:
Expected Attenuation is 30 dBA**

The MB31 provides the highest degree of overall noise attenuation on blower intakes or discharges. Use an MB31 where background noise is extremely low and the best degree of silencing is required.

OVERVIEW

TYPICAL APPLICATIONS




- Rotary positive blower intake and discharge
- Wet exhaust systems
(Mix temperature not to exceed 200 °F at silencer)

FEATURES

- Advanced acoustical design
- High quality sound absorbing material
- Double wall, all welded construction
- Packed inlet
- Prime coated exterior finish

OPTIONAL ACCESSORIES

- Stainless steel or monel construction
- Flanged connections
- Standard pipe size necks
- Horizontal or vertical support arrangements
- Special paint

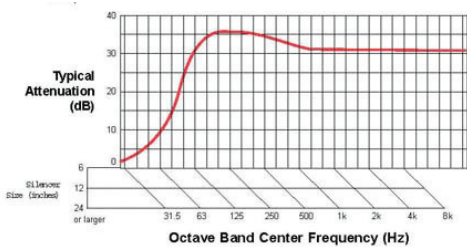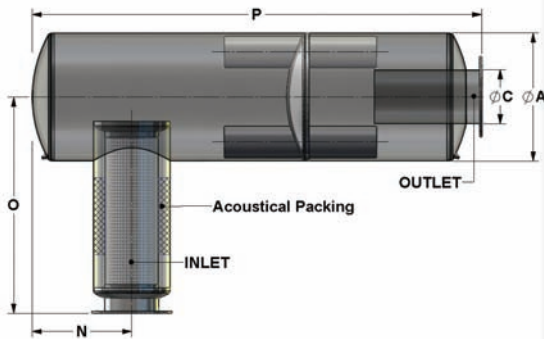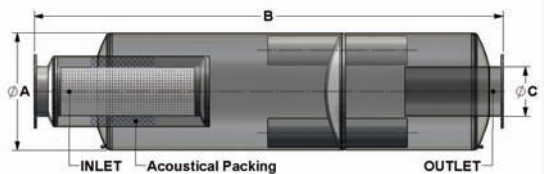

Size	A	B	C	N		O	P	Est Wt.
				Min.	Max.			
4"	14	52	4	8 ½	19	23	45	150
5"	16	60	5	10	21 ½	26	52 ¼	195
6"	18	69	6	10	26 ½	30	60 ¼	250
8"	22	84	8	11	33 ½	36	73 ½	380
10"	26	101	10	13 ½	40	43	88	620
12"	30	121	12	15	50	51	106 ¼	1030
14"	36	115	14	18	44	52	99 ¼	1230
16"	40	135	16	20	53	59	116 ½	1815
18"	45	140	18	25	54	58	124	2750
20"	50	159	20	26	64	59	141 ¼	3210
22"	54	177	22	29	71	60	154 ¼	3895
24"	60	184	24	30	73	60	162 ¼	4330
26"	64	204	26	31	84	60	180 ½	5005
28"	68	223	28	33	92	62	197 ¾	6625
30"	72	241	30	34	102	62	213 ¾	7315
32"	76	250	32	36 ½	102 ½	64	220 ¾	8415
34"	82	252	34	37 ½	102 ½	64	220 ½	8995
36"	86	254	36	37 ½	102 ½	65	221	9485

Note: Dimensions are in inches, weights are in pounds.