

OVERVIEW

**Compact "Pancake" Silencer:  
Expected Attenuation is 28 to 32 dBA**

The MD26 is engineered to provide a "critical" grade of attenuation while minimizing space usage. It is an excellent choice for packaged power and process skids where space is a premium. Dual inlets and other custom designs can be easily incorporated.

Low temperature design not only reduces skin temperature, but radiated noise as well.

These units feature heavy duty, welded construction with temperature resistant insulation within a double wall construction. The inlet and outlets are standard with ANSI drilled 125/150 lb flanges.

Standard finish is high temperature resistant silicone black. Alternate finishes are available upon request. Standard material is carbon steel, but stainless steel construction is available.

FEATURES


- Low surface temperature design
- Heavy duty, welded construction
- ANSI drilled flanges on inlet and outlet
- High-temperature, prime coated black finish
- Lift lugs

OPTIONAL ACCESSORIES

- Aluminized construction
- Stainless steel construction
- Custom inlet and outlet size and location
- Support brackets
- Special paint

TYPICAL APPLICATIONS

- Internal combustion engines

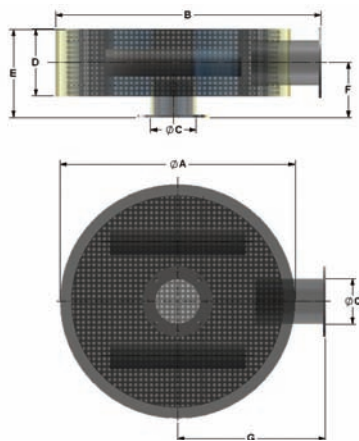

Size	A	B	C	D	E	F	G	Est Wt.
4"	28	32	4	8	12	8	18	134
5"	29	33	5	10	14	9	18.5	171
6"	33	37	6	12	16	10	20.5	230
8"	45	49	8	13	17	10.5	26.5	401
10"	52	56	10	16	20	12	30	605
12"	62	66	12	18	22	13	35	840
14"	64.4	68.4	14	23	27	15.5	36.2	1022
16"	74.4	78.4	16	25	29	16.5	41.2	1402
18"	84.6	88.6	18	27	31	17.5	46.3	1744

Note: Dimensions are in inches, weights are in pounds.

