

**Marine Engine, Wet Exhaust Silencer:
Expected Attenuation is 15 to 18 dB**

Constructed of 316L Stainless Steel, the MP11 offers good noise attenuation with low pressure drop in marine exhaust systems where water is injected upstream of the silencer.

OVERVIEW

- Advanced acoustical design
- Reduces noxious fumes and odors
- Thick wall construction for high transmission loss
- All welded construction and long service life
- Easy installation in any position


FEATURES

- Internal combustion engines using wet type exhaust
(Mixed exhaust flow temperature not to exceed 200 °F at silencer inlet)

TYPICAL APPLICATIONS

- Monel construction
- Flanged connections
- Standard pipe size O.D. stubs
- Horizontal or vertical support arrangements

OPTIONAL ACCESSORIES

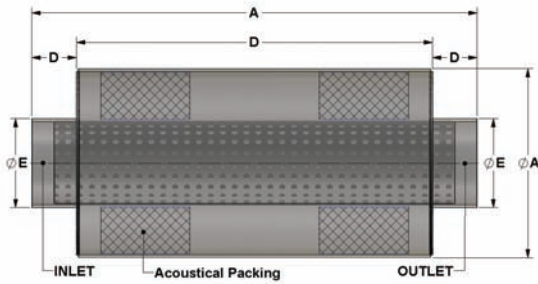

Size	A	B	C	D	E	Est Wt.
4"	10 3/4	24	18	3	4	43
4 1/2"	10 3/4	24	18	3	4 1/2	43
5"	12 3/4	30	24	3	5	63
6"	12 3/4	30	24	3	6	65
8"	14 1/2	48	36	6	8	123
10"	16 3/4	60	48	6	10	191
12"	18 3/4	72	60	6	12	225

Note: Dimensions are in inches, weights are in pounds.

