

**Marine Engine, Wet Exhaust Silencer:**  
**Expected Attenuation is 20 to 25 dBA**

Constructed of 316L Stainless Steel, the MP31 offers very good noise attenuation with medium pressure drop in marine exhaust systems where water is injected upstream of the silencer.

OVERVIEW

TYPICAL APPLICATIONS


- Internal combustion engines using wet type exhaust  
 (Mixed exhaust flow temperature not to exceed 200 °F at silencer inlet)

FEATURES

- Advanced acoustical design
- Reduces noxious fumes and odors
- Thick wall construction for high transmission loss
- All welded construction and long service life
- Easy installation in any position

OPTIONAL ACCESSORIES

- Monel construction
- Flanged connections
- Standard pipe size O.D. stubs
- Horizontal or vertical support arrangements

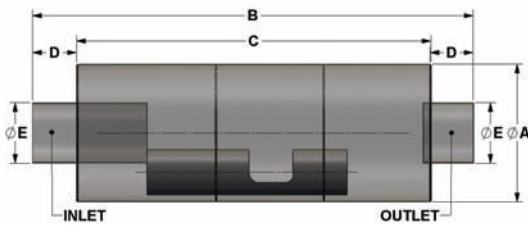

Size	A	B	C	D	E	Est Wt.
4"	8 3/4	30	24	3	4	39
4 1/2"	10 3/4	36	30	3	4 1/2	61
5"	10 3/4	36	30	3	5	61
6"	12 3/4	42	36	3	6	94
8"	16 3/4	60	48	6	8	143
10"	20 1/4	70	58	6	10	230
12"	24 1/4	82	70	6	12	327

Note: Dimensions are in inches, weights are in pounds.

