

OVERVIEW

**Residential Straight Through,  
Low Pressure Drop Design:  
Expected Attenuation is 20 to 25 dBA**

Use an MT22 for silencing in areas where background noise is relatively high and moderate silencing is needed and requirements call for a low pressure drop silencer.

TYPICAL APPLICATIONS



- Internal combustion engine intakes and exhausts
- Blower intakes and discharges
- Vacuum pump discharges
- Turb charged reciprocating engines with low allowable back pressure

FEATURES

- Advanced acoustical design
- All welded construction and long service life
- Easily installed in any position
- High heat silicone black finish
- Two chambers
- Drain connections

OPTIONAL ACCESSORIES

- Explosion relief cover
- Flexible connectors
- Companion flanges
- Cleanout openings
- Horizontal or vertical support arrangements
- Special paint
- Stainless steel construction: 304, 316 & 321
- Complete range of exhaust accessories

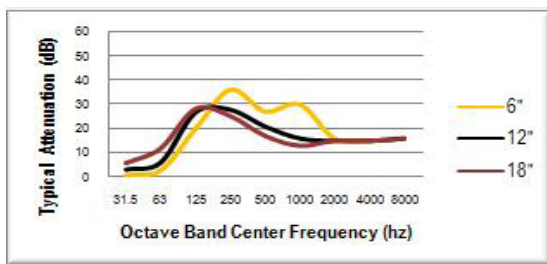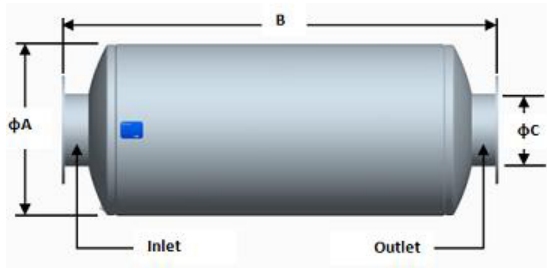

| Size | A  | B   | C  | Est Wt. |
|------|----|-----|----|---------|
| 4"   | 14 | 36  | 4  | 64      |
| 5"   | 16 | 43  | 5  | 87      |
| 6"   | 18 | 49  | 6  | 109     |
| 8"   | 22 | 59  | 8  | 181     |
| 10"  | 26 | 64  | 10 | 290     |
| 12"  | 30 | 77  | 12 | 440     |
| 14"  | 36 | 83  | 14 | 593     |
| 16"  | 40 | 90  | 16 | 813     |
| 18"  | 45 | 96  | 18 | 963     |
| 20"  | 50 | 109 | 20 | 1438    |
| 22"  | 54 | 119 | 22 | 1845    |
| 24"  | 60 | 125 | 24 | 2194    |
| 26"  | 64 | 140 | 26 | 2573    |
| 28"  | 68 | 155 | 28 | 2966    |
| 30"  | 72 | 166 | 30 | 3381    |

Note: Dimensions are in inches, weights are in pounds