

OVERVIEW

Critical Straight Through, Low Pressure Drop Design: Expected Attenuation is 25 to 32 dBA

Use an MT32 for average silencing in areas where some background noise is always present and effective, but not complete, silencing is needed and requirements call for a low pressure drop silencer.

TYPICAL APPLICATIONS



- Internal combustion engine intakes and exhausts
- Blower intakes and discharges
- Vacuum pump discharges
- Turb charged reciprocating engines with low allowable back pressure

FEATURES

- Advanced acoustical design
- All welded construction and long service life
- Easily installed in any position
- High heat silicone black finish
- Two chambers
- Drain connections

OPTIONAL ACCESSORIES

- Explosion relief cover
- Flexible connectors
- Companion flanges
- Cleanout openings
- Horizontal or vertical support arrangements
- Special paint
- Stainless steel construction: 304, 316 & 321
- Complete range of exhaust accessories

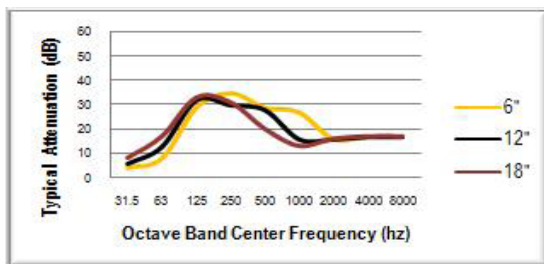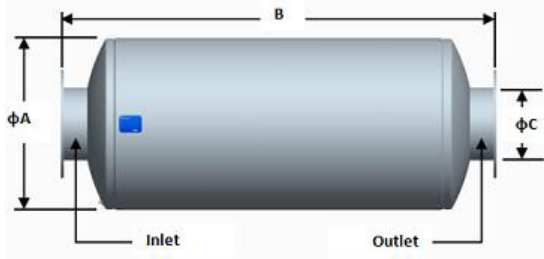

Size	A	B	C	Est Wt.
4"	14	48	4	80
5"	16	57	5	109
6"	18	63	6	136
8"	22	74	8	217
10"	26	87	10	377
12"	30	102	12	552
14"	36	109	14	731
16"	40	119	16	1013
18"	45	127	18	1204
20"	50	137	20	1754
22"	54	149	22	2199
24"	60	162	24	2660
26"	64	183	26	3135
28"	68	200	28	3589
30"	72	216	30	4124

Note: Dimensions are in inches, weights are in pounds