

OVERVIEW

Super Critical Grade Straight Through, Low Pressure Drop Design: Expected Attenuation is 30 to 38 dBA

Use an MT42 for better than average silencing in areas where ambient noise is relatively low and back pressure requirements call for a low pressure drop silencer..

TYPICAL APPLICATIONS



- Internal combustion engine intakes and exhausts
- Blower intakes and discharges
- Vacuum pump discharges
- Turbo charged reciprocating engines with low allowable back pressure

FEATURES

- Advanced acoustical design
- All welded construction and long service life
- Easily installed in any position
- High heat silicone black finish
- Two chambers
- Drain connections

OPTIONAL ACCESSORIES

- Explosion relief cover
- Flexible connectors
- Companion flanges
- Cleanout openings
- Horizontal or vertical support arrangements
- Special paint
- Stainless steel construction: 304, 316, 321
- Complete range of exhaust accessories

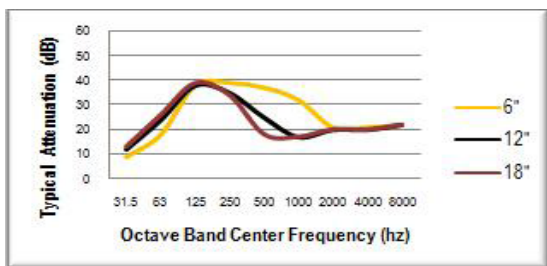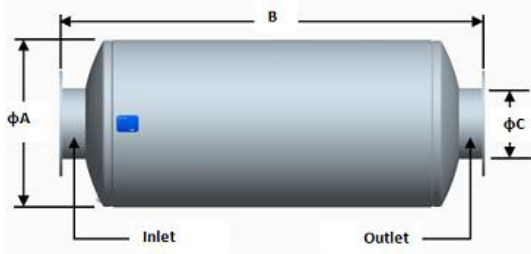

Size	A	B	C	Est Wt.
4"	16	51	4	96
5"	18	62	5	129
6"	22	69	6	185
8"	26	82	8	318
10"	30	102	10	509
12"	36	112	12	691
14"	40	120	14	989
16"	45	126	16	1182
18"	50	135	18	1663
20"	54	149	20	2156
22"	60	157	22	2563
24"	64	164	24	2911
26"	68	184	26	3399
28"	72	205	28	3921
30"	78	220	30	5437

Note: Dimensions are in inches, weights are in pounds