

Atmospheric Vent Silencer for High Attenuation of High Frequency Noise: Expected Attenuation is 42 to 45 dBA

Use for better vent silencing of high frequency noise associated with steam or gas vents. The VT-2 is shorter and more economical than the VT-3.

OVERVIEW

TYPICAL APPLICATIONS


- Process vents
- Safety and relief valve discharge
- Small process vents
- Compressor & gas transmission line blowdown

FEATURES

- Advanced acoustical design
- Heavy duty, all welded construction and long service life
- Long strand glass wool packing
- Prime coated exterior finish
- ASME code inlet available

OPTIONAL ACCESSORIES

- Companion flanges
- Metallic wool packing
- Side inlet connection
- Horizontal or vertical support arrangements
- Flanged inlet
- Special paint
- Stainless steel construction

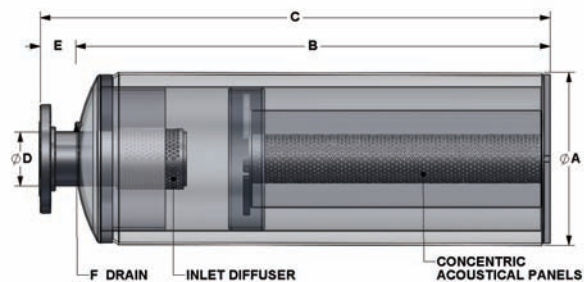

Size	A	B	C	D	E	F	Est Wt.
14"	14	56 ½	59 ½	4	3	1	260
18"	18	65 ½	68 ½	6	3	1	345
22"	22	82	85	6	3	1	480
26"	26	96	99	8	3	1	985
30"	30	113	116 ½	10	3 ½	1	1380
36"	36	135 ½	139	12	3 ½	1	1835
40"	40	153	156 ½	14	3 ½	1	2665
45"	45	169 ½	173	16	3 ½	1	3380

Note: Dimensions are in inches, weights are in pounds.

