

Atmospheric Vent Silencer for Small Gas Flow Rates: Expected Attenuation is 35 to 40 dBA

For relatively small vent applications, the VT-S offers impressive silencing of the noise associated with steam or gas vents. The VT-S has a very high performance to cost ratio.

OVERVIEW

TYPICAL APPLICATIONS


- Steam ejectors
- Small steam or gas vents
- Small process vents
- Turbine and compressor bypass
- Small safety and relief valves

FEATURES

- Advanced acoustical design
- Heavy duty, all welded construction and long service life
- Acoustical wool packing
- Prime coated exterior finish
- ASME code inlet available

OPTIONAL ACCESSORIES

- Companion flanges
- Metallic wool packing
- Stub inlet and outlet connection
- Horizontal or vertical support arrangements
- Special paint
- Stainless steel construction

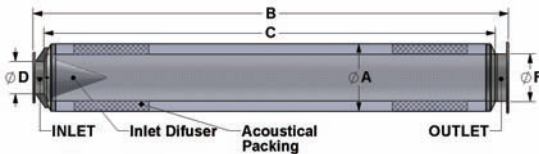

Size	A	B	C	D	E	F	Est Wt.
5"	12	66	60	2	3	5	98
6"	12	78	72	3	3	6	112
8"	14	86	80	4	3	8	152
10"	16	106	100	6	3	10	250
12"	18	127	120	8	3 1/2	12	340

Note: Dimensions are in inches, weights are in pounds.

