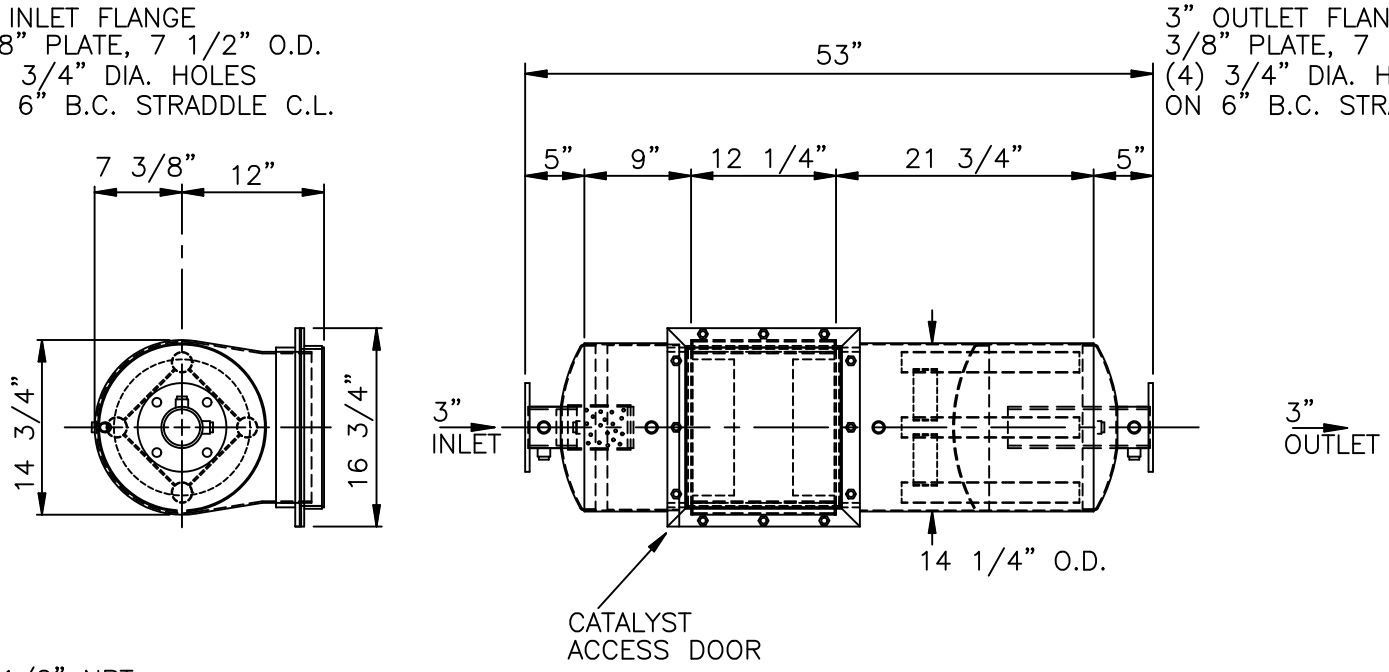

SERVICE: CATALYTIC EXHAUST SILENCER FOR RECIPROCATING ENGINE

OCTAVE BAND	63	125	250	500	1K	2K	4K	8K
INSERTION LOSS	19	30	35	35	30	30	30	30

PRESSURE DROP: (5.0)*(VELOCITY HEAD IN 3") + CATALYST PRESSURE DROP

MATERIALS OF CONSTRUCTION:

SHELL: 10 GA AND 12 GA CARBON STEEL
HEADS: 10 GA AND 12 GA CARBON STEEL
CATALYST PANELS: (1) OR (2) 3.5" THICK x 11 1/2" DIAMETER 304SS
FLANGES: 3/8" CARBON STEEL (3"150# DRILLING)

EXTERNAL PAINT: HIGH TEMP BLACK

WEIGHT: 175 LBS.

CERTIFICATION

CUSTOMER: _____

CUSTOMER P.O. NO.: _____

_____

DATE: _____ BY: _____

No.	REVISIONS	BY	DATE

MAXIM SILENCERS

10635 BRIGHTON LANE
STAFFORD, TX. 77477
PHONE (832) 554-0980
FAX (832) 554-0990

EAC4-24-3 CATALYTIC EXHAUST SILENCER

DRAWN	TJW	1/3/08	ORDER NO.	DRAWING NO.	REV
CHECKED				STD_EAC4-24-3	
APPROVED	TJW	1/3/08	SHEET		