10" INLET AND OUTLET FLANGES:
1/2" PLATE TO MATCH 10" 150# ANSI
16" O.D.
(12) 1" ø HOLES ON 14 1/4" B.C.
STRADDLE C.L.

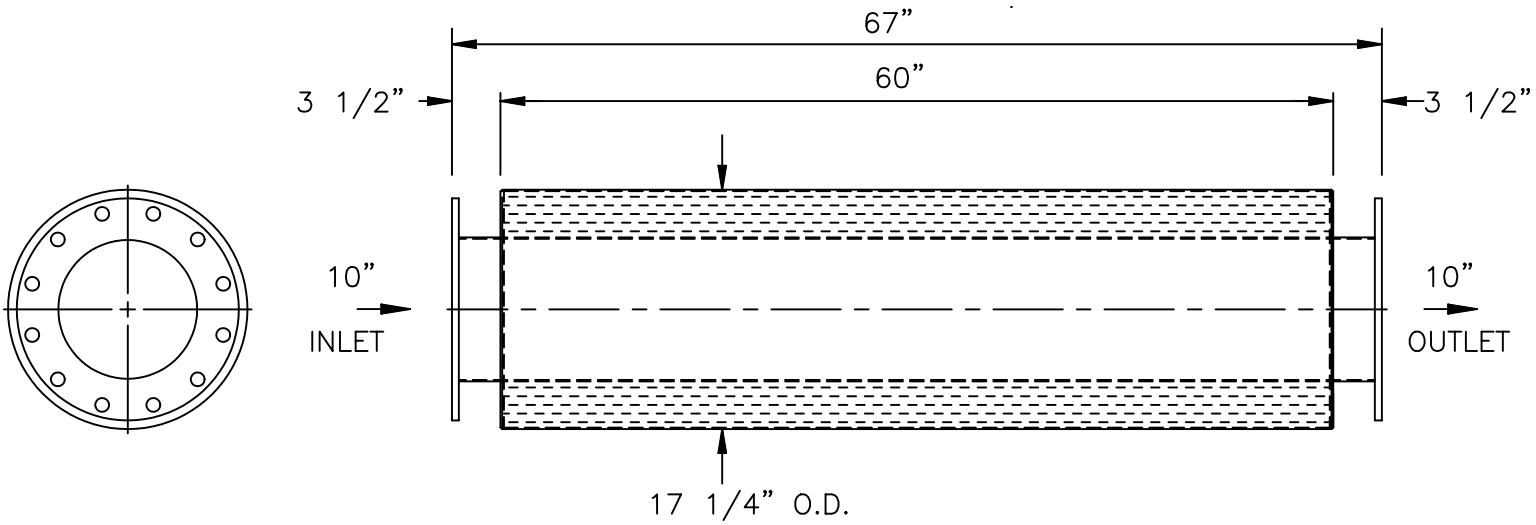

SERVICE: INLINE ABSORPTIVE SILENCER

ATTENUATION: 20–25 dBA TYPICAL

MATERIALS OF CONSTRUCTION :
SHELL: 12 GA CARBON STEEL
PERFO: 14 GA CARBON STEEL
PACKING: FIBERGLASS OR CERAMIC WOOL MAT WITH GLASS CLOTH AND 304SS SCREEN WIRE

EXTERNAL PAINT: BLACK, HIGH TEMPERATURE

WEIGHT: 180 LBS.

CERTIFICATION

CUSTOMER: _____

CUSTOMER P.O. NO.: _____

DATE: BY:

No.	REVISIONS	APPR.

MAXIM SILENCERS

10635 BRIGHTON LANE
STAFFORD, TX. 77477
PHONE (832) 554-0980
FAX (832) 554-0990

10" FPE INLINE ABSORPTIVE SILENCER

			ORDER NO.	DRAWING NO.	REV
DRAWN	TJW	2/12/03			
CHECKED				STD_10FPE	
APPROVED			SHEET	Sheet 1 of 1	