6" INLET AND OUTLET FLANGES
1/2" PLATE, 11" O.D.
(8) 7/8" DIA. HOLES
ON 9 1/2" B.C. STRADDLE C.L.

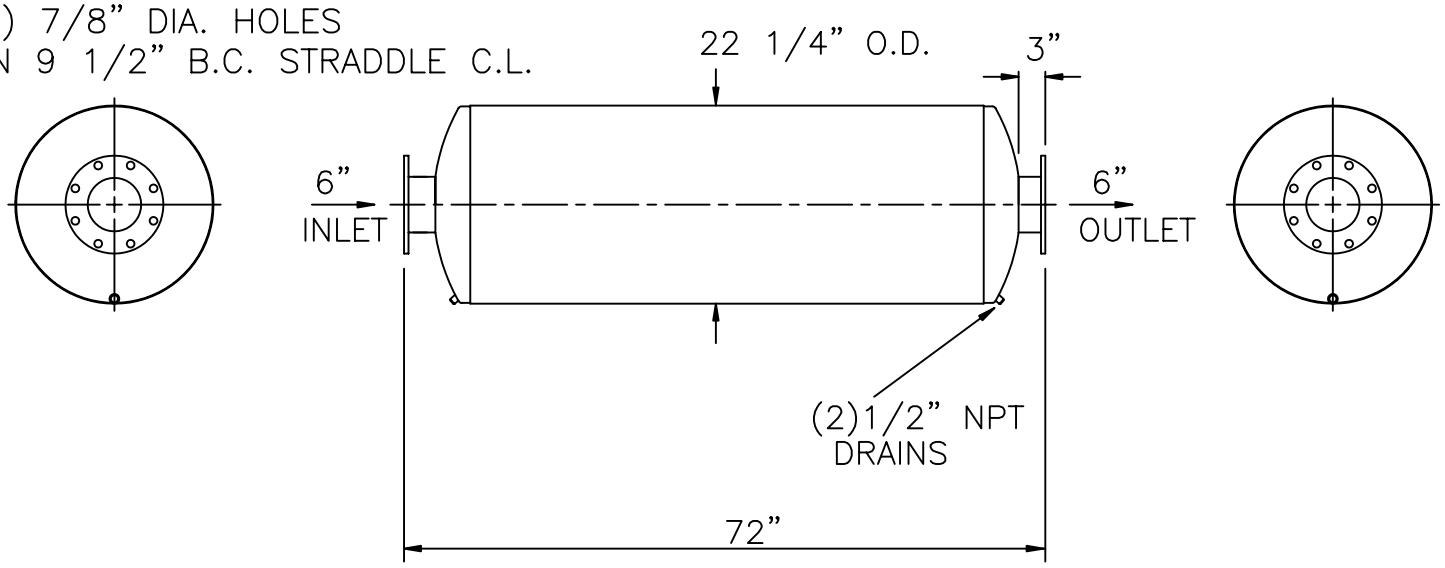

SERVICE: EXHAUST SILENCER FOR ENGINE

OCTAVE BAND	63	125	250	500	1K	2K	4K	8K
INSERTION LOSS	20	30	30	28	23	23	23	25

PRESSURE DROP: (4.0)(Velocity Head In 6" I.D. Duct)

MATERIALS OF CONSTRUCTION:
SHELL: DOUBLE WRAP 16 GA CARBON STEEL
HEADS: 10 GA CARBON STEEL

EXTERNAL PAINT: HIGH TEMP BLACK

WEIGHT: 255 LBS.

CERTIFICATION

CUSTOMER: _____

CUSTOMER P.O. NO.: _____

_____

DATE: _____ BY: _____

No.	REVISIONS	APPR.

MAXIM SILENCERS

601 BENTON KELLY STREET
SHREVEPORT, LA. 71106-7198
PHONE (318) 865-6351
FAX (318) 868-1701

6"M41 EXHAUST SILENCER

			ORDER NO.	DRAWING NO.	REV
DRAWN	TJW	4/7/04			
CHECKED				STD_6M41	
APPROVED					