4" INLET AND OUTLET FLANGES
1/2" PLATE, 9" O.D.
(8) 7/8" DIA. HOLES
ON 9 1/2" B.C. STRADDLE C.L.

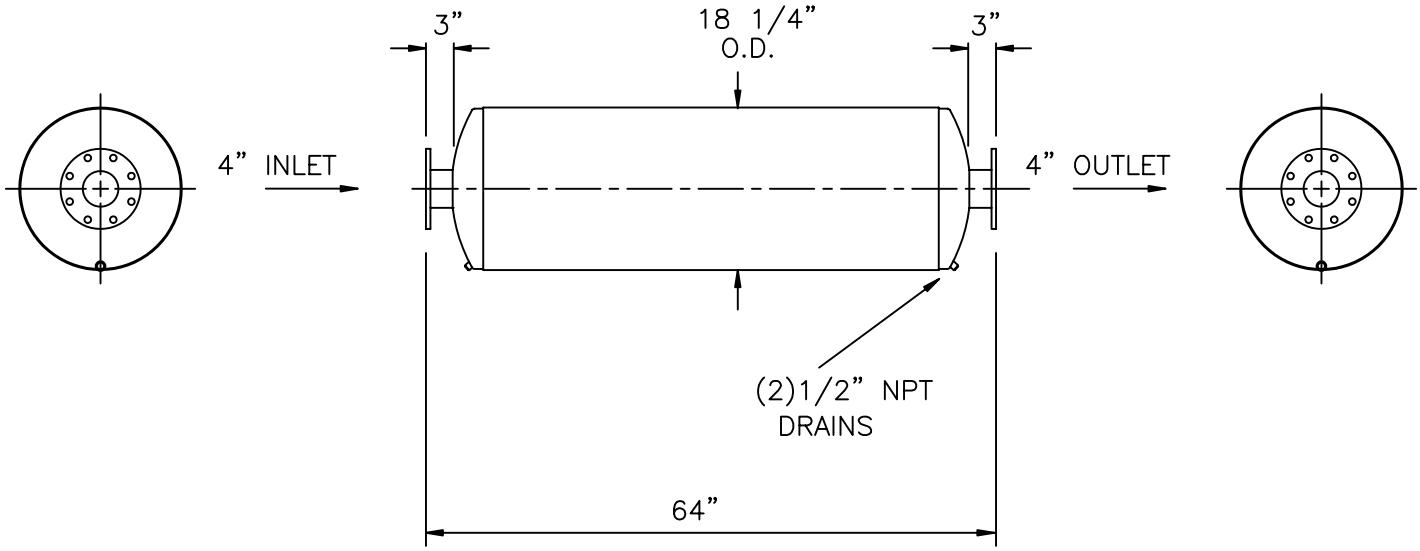

SERVICE: EXHAUST SILENCER FOR ENGINE

OCTAVE BAND	63	125	250	500	1K	2K	4K	8K
INSERTION LOSS	19	30	37	36	31	28	28	28

PRESSURE DROP: (4.0)(Velocity Head In 4" I.D. Duct)

MATERIALS OF CONSTRUCTION:
SHELL : DOUBLE WRAP 16 GA CARBON STEEL
HEADS : 12 GA CARBON STEEL

EXTERNAL PAINT: HIGH TEMP BLACK

WEIGHT: 200 LBS.

CERTIFICATION

CUSTOMER: _____

CUSTOMER P.O. NO.: _____

_____

DATE: _____ BY: _____

				MAXIM SILENCERS				10635 BRIGHTON LANE STAFFORD, TX. 77477 PHONE (832) 554-0980 FAX (832) 554-0990	
				4"M51 EXHAUST SILENCER					
				DRAWN	TJW	4/1/02	ORDER NO.	DRAWING NO.	REV
				CHECKED				STD_4M51	
No.	REVISIONS		APPR.	APPROVED					