TOP VIEW:

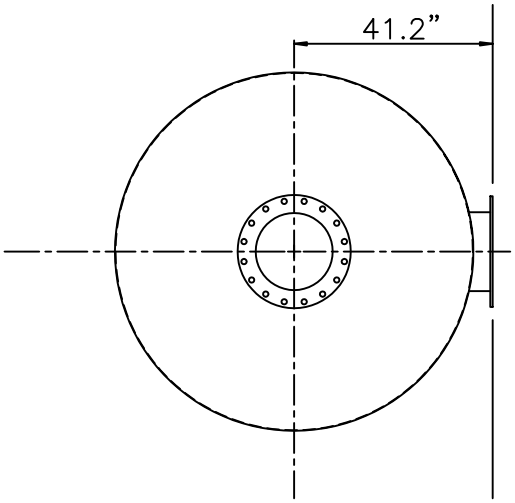

16" INLET & OUTLET FLANGES
1/2" PLATE, 23 1/2" O.D.
(16) 1 1/8" DIAMETER HOLES
ON A 21 1/4" DIA. CIRCLE.
HOLES STRADDLE CENTERLINE.

SIDE VIEW:

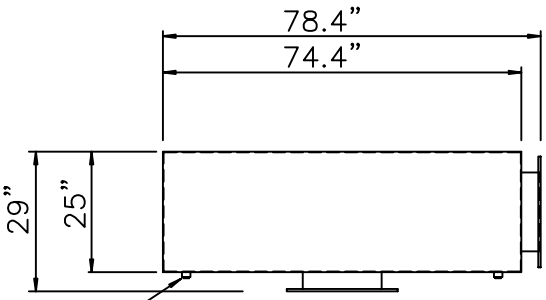

(2) 1/2" FNPT DRAINS

SERVICE:
EXHAUST SILENCER FOR CUMMINS QSK60-G6 ENGINE

PRESSURE DROP:(4.0)*(Velocity Head In 16" I.D.Duct)

OCTAVE BAND	63	125	250	500	1k	2k	4k	8k
ATTENUATION, dB	16	25	30	32	32	32	28	28

MATERIALS OF CONSTRUCTION:
SHELL: 12 GA CARBON STEEL
TOP AND BOTTOM HEADS: 10 GA. CARB. STL.
FLANGES: 1/2" CARBON STEEL
ACOUSTICAL INSULATION: 2" OF CERAMIC MAT, 6#, ON INSIDE SURFACE OF TOP, BOTTOM, AND SIDES. PROTECTED BY 12 GA CS PERFO, AND GLASS CLOTH.

CERTIFICATION

CUSTOMER: _____

CUSTOMER P.O. NO.: _____

DATE: _____ BY: _____

EXTERNAL PAINT:
FLAT BLACK, HIGH TEMPERATURE

WEIGHT: 1,345 LBS

				MAXIM SILENCERS			10635 BRIGHTON LANE STAFFORD, TX. 77477 PHONE (832) 554-0980 FAX (832) 554-0990		
				16"MD26 EXHAUST SILENCER					
				DRAWN	TJW	2/22/05	ORDER NO.	DRAWING NO.	REV
				CHECKED				A092205	
No.	REVISIONS		APPR.	APPROVED	TJW	2/25/05			