


5" OUTLET FLANGE  
 1/2" PLATE, 10" O.D.  
 (8) 7/8" DIA. HOLES  
 ON 8 1/2" B.C.  
 STRADDLE C.L.

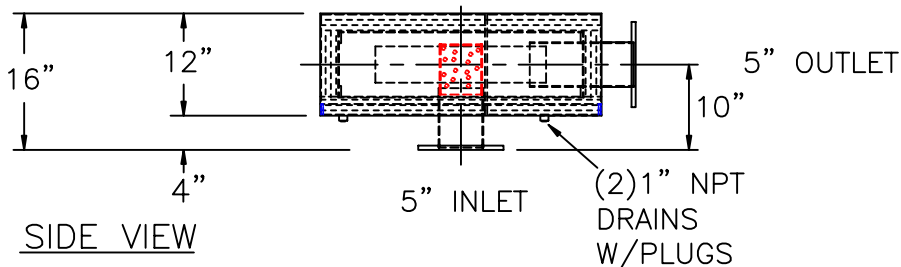

5" INLET FLANGE  
 1/2" PLATE, 10" O.D.  
 (8) 7/8" DIA. HOLES  
 ON 8 1/2" B.C.  
 STRADDLE C.L.

SERVICE: ENGINE EXHAUST SILENCER

PRESSURE DROP: (4.0)\*(Velocity Head In 5")

SILENCER OVERALL NOISE REDUCTION: 30 - 36 dBA

OCTAVE BAND:            63    125    250    500    1k    2k    4k    8k  
TYPICAL ATTENUATION, dB: 15    25    33    37    36    34    32    30

(5" SIZE)

MATERIALS OF CONSTRUCTION:

- SHELL: 12 GAGE CARBON STEEL
- HEADS: 10 GAGE CARBON STEEL
- PERFO: 12 GA CARBON STEEL
- PACKING: 2" FIBERGLASS (ALL WALLS)

EXTERNAL PAINT: HIGH TEMP BLACK

WEIGHT: 225 LBS.

CERTIFICATION

CUSTOMER: \_\_\_\_\_

CUSTOMER P.O. NO.: \_\_\_\_\_

DATE: \_\_\_\_\_ BY: \_\_\_\_\_

MAXIM SILENCERS 10635 BRIGHTON LANE  
 STAFFORD, TX 77477  
 PHONE (832) 554-0980  
 FAX (832) 554-0990

5"MD36 COMPACT EXHAUST SILENCER  
 (SUPER CRITICAL GRADE, INTERNALLY INSULATED)

DRAWN TJW 9/10/03 ORDER NO. DRAWING NO. REV

CHECKED \_\_\_\_\_ STD\_5MD36

No. REVISIONS APPR. APPROVED