INLET AND OUTLET:
3" MNPT

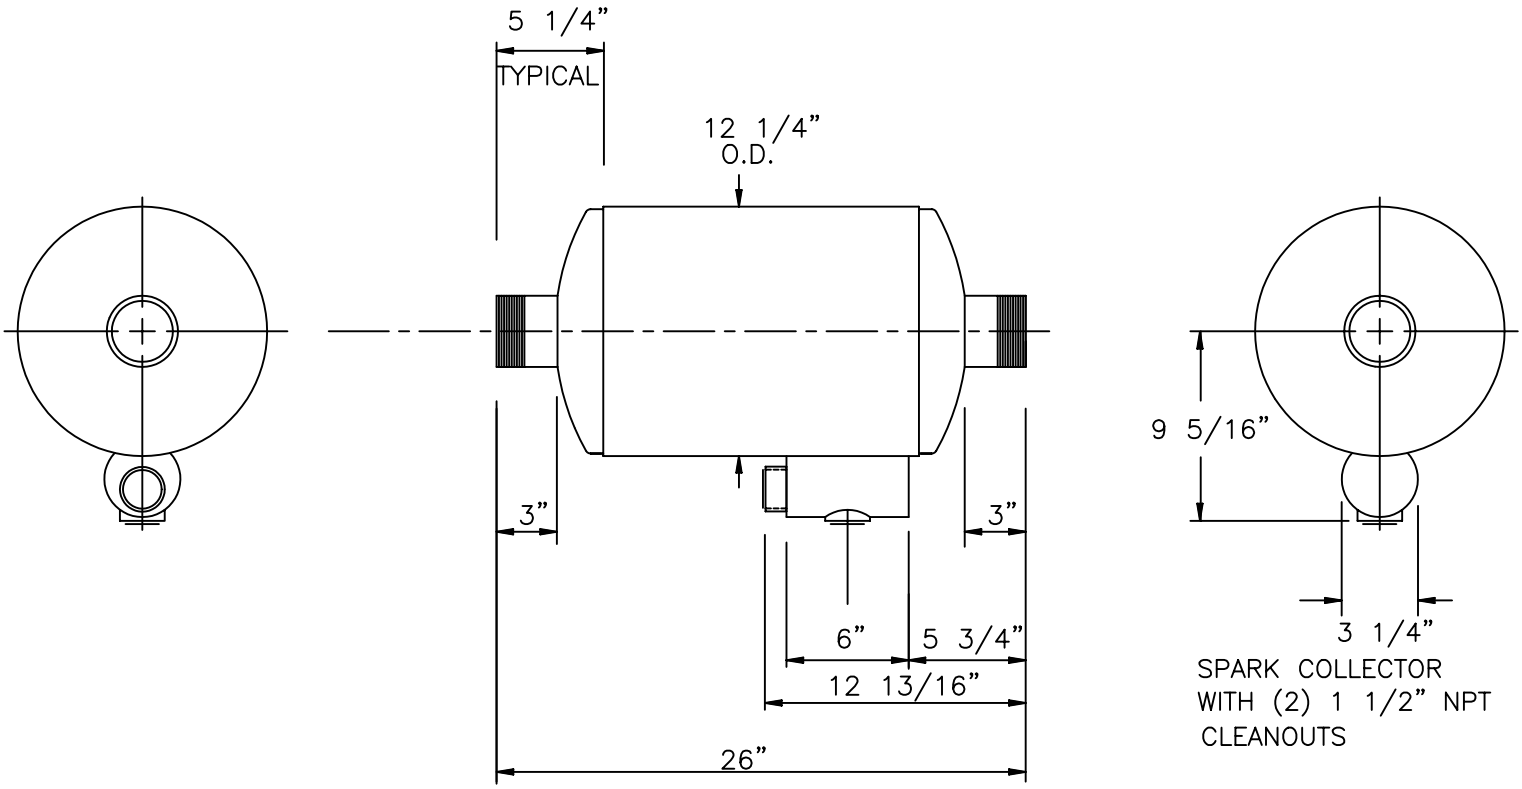

SERVICE: SPARK ARRESTING EXHAUST SILENCER FOR RECIPROCATING ENGINE

OCTAVE BAND	63	125	250	500	1K	2K	4K	8K
INSERTION LOSS	4	12	24	26	21	16	16	17

SILENCER PRESSURE DROP: (4.0)*(Velocity Head In 3" I.D. Duct)

MATERIALS OF CONSTRUCTION: CARBON STEEL
SHELL: 16 GAGE
HEADS AND BAFFLES: 14 GAGE, F&D
INLET AND OUTLET: 3" SCH 40, MNPT

EXTERNAL PAINT: FLAT BLACK, HIGH TEMPERATURE

WEIGHT: 36 LBS

CERTIFICATION

CUSTOMER: _____

CUSTOMER P.O. NO.: _____

DATE: _____ BY: _____

				MAXIM SILENCERS				10635 BRIGHTON LANE STAFFORD, TX. 77477 PHONE (832) 554-0980 FAX (832) 554-0990	
				3"MSA1 SPARK ARRESTING EXHAUST SILENCER					
				DRAWN	TJW	1/13/05	ORDER NO.	DRAWING NO.	REV
				CHECKED				STD_3MSA1	
No.	REVISIONS		APPR.	APPROVED				Sheet 1 of 1	