INLET AND OUTLET FLANGES:
1/2" PLATE, 10" 150# DRILLING
16" O.D. WITH (12) 1"ø
HOLES ON 14 1/4" B.C.,
STRADDLE C.L.

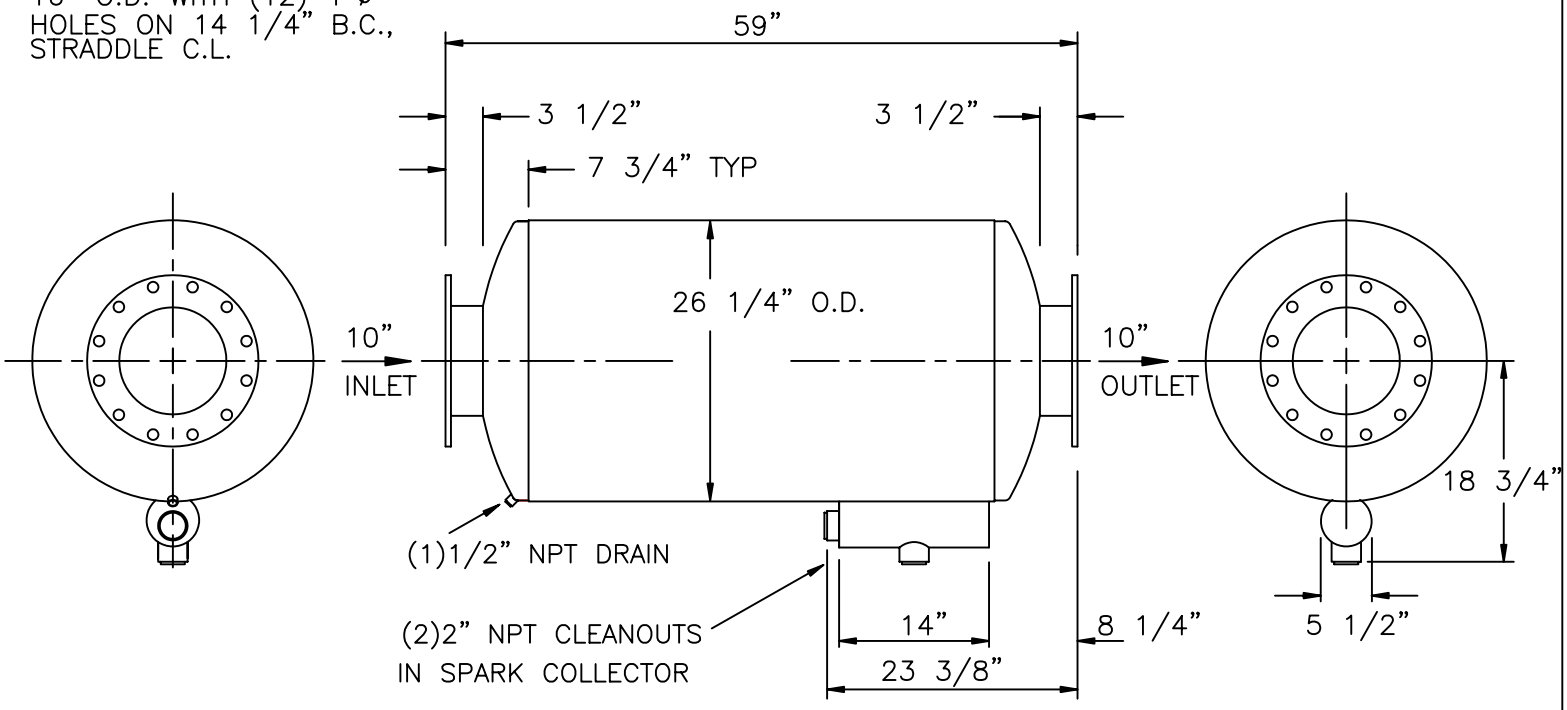

SERVICE: SPARK ARRESTING EXHAUST SILENCER FOR RECIPROCATING ENGINE

OCTAVE BAND	63	125	250	500	1K	2K	4K	8K
INSERTION LOSS	10	19	27	24	18	16	16	17

SILENCER PRESSURE DROP: 4*Velocity Head in 10" Duct

MATERIALS OF CONSTRUCTION: CARBON STEEL
SHELL: 12 GAGE
HEADS AND BAFFLES: 10 GAGE, F&D
FLANGES: 1/2" PLATE

EXTERNAL PAINT: FLAT BLACK, HIGH TEMPERATURE

WEIGHT: 380 LBS

CERTIFICATION

CUSTOMER: _____

CUSTOMER P.O. NO.: _____

_____

DATE: _____ BY: _____

No.	REVISIONS	APPR.

MAXIM SILENCERS

10635 BRIGHTON LANE
STAFFORD, TX. 77477
PHONE (832) 554-0980
FAX (832) 554-0990

10"MSA1 SPARK ARRESTING EXHAUST SILENCER

			ORDER NO.	DRAWING NO.	REV
DRAWN	TJW	7/18/04			
CHECKED				STD_10MSA1	
APPROVED				Sheet 1 of 1	