5" INLET AND OUTLET FLANGES
1/2" PLATE, 10" O.D.
(8) 7/8" DIA. HOLES
ON 8 1/2" B.C. STRADDLE C.L.

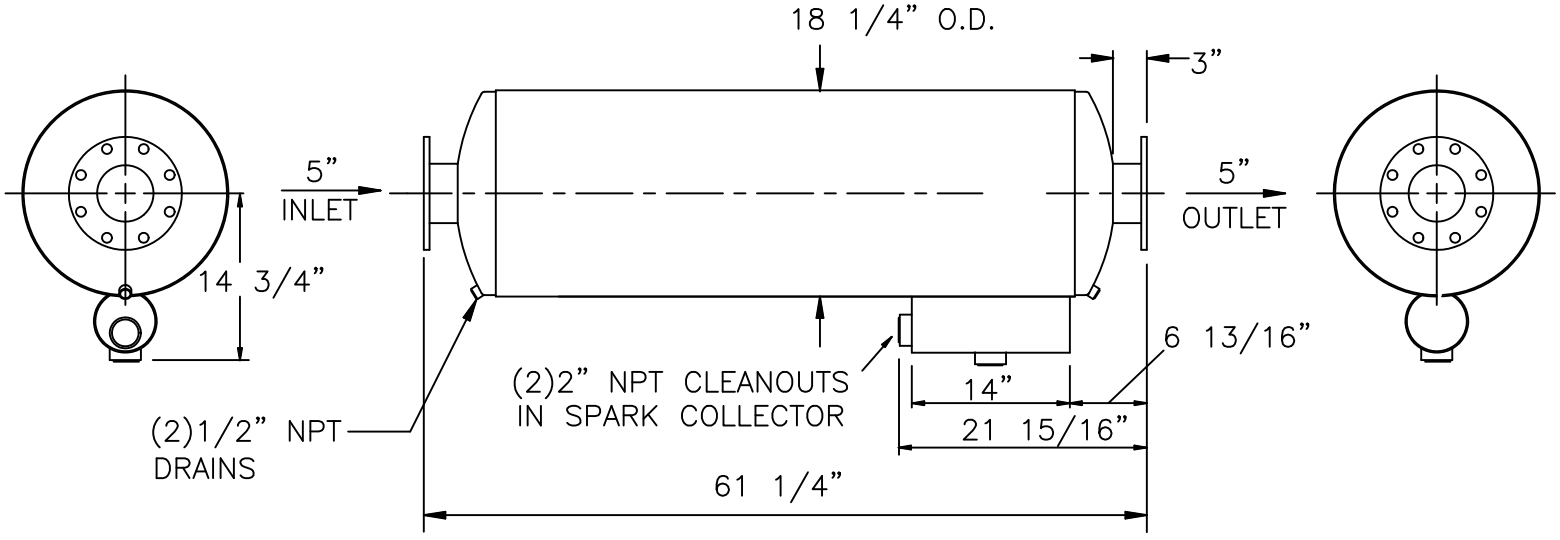

SERVICE: EXHAUST SILENCER FOR ENGINE

OCTAVE BAND	63	125	250	500	1K	2K	4K	8K
INSERTION LOSS	16	27	35	33	28	23	23	25

PRESSURE DROP: (4.0)(Velocity Head In 5" I.D. Duct)

MATERIALS OF CONSTRUCTION:
SHELL: DOUBLE WRAP 16 GA CARBON STEEL
HEADS: 12 GA CARBON STEEL

EXTERNAL PAINT: HIGH TEMP BLACK

WEIGHT: 170 LBS.

CERTIFICATION

CUSTOMER: _____

CUSTOMER P.O. NO.: _____

_____

DATE: _____ BY: _____

No.	REVISIONS	APPR.

MAXIM
SILENCERS, INC.

10635 BRIGHTON LANE
STAFFORD, TEXAS 77477
PHONE (832) 554-0980
FAX (832) 554-0990

5"MSA3 EXHAUST SILENCER

			ORDER NO.	DRAWING NO.	REV
DRAWN	JJ	12/20/07			
CHECKED				STD_5MAS3	
APPROVED					