8" INLET FLANGE
1/2" PLATE, 13 1/2" O.D.
(8) 7/8" DIA. HOLES
ON 11 3/4" B.C. STRADDLE C.L.

8" OUTLET FLANGE
1/2" PLATE, 13 1/2" O.D.
(8) 7/8" DIA. HOLES
ON 11 3/4" B.C. STRADDLE C.L.

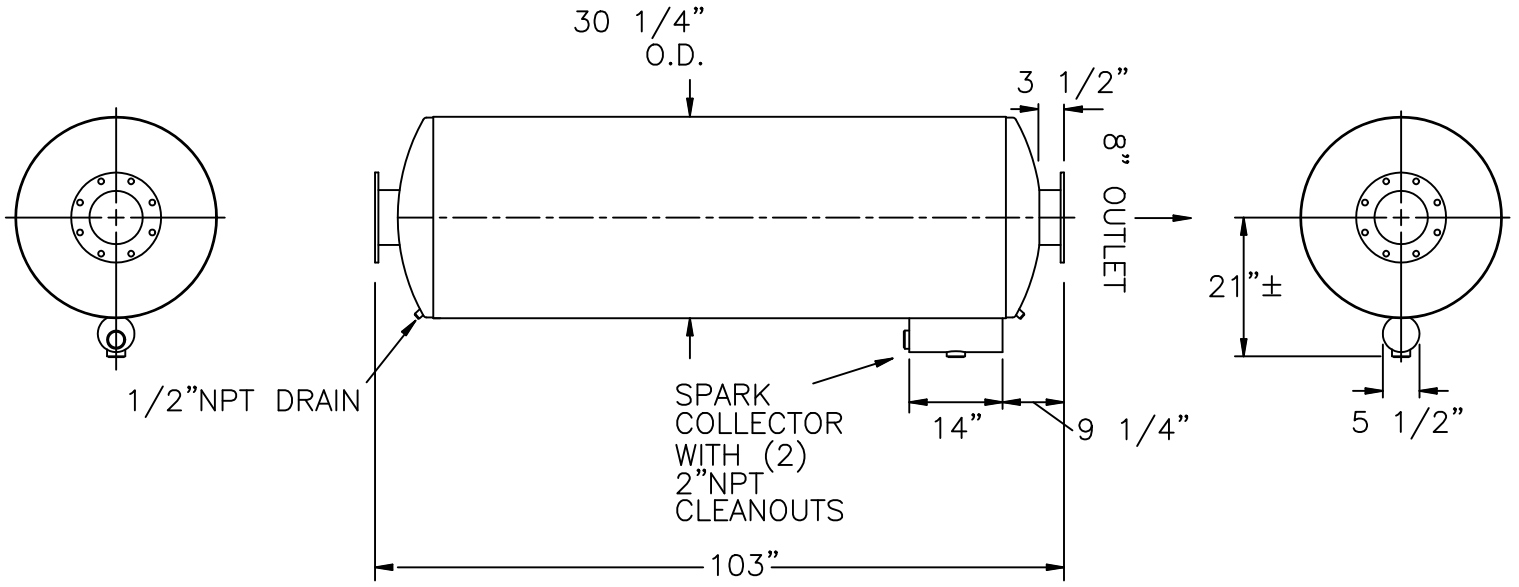

SERVICE: SPARK ARRESTING EXHAUST SILENCER FOR RECIPROCATING ENGINE

OCTAVE BAND	63	125	250	500	1K	2K	4K	8K
INSERTION LOSS	22	33	37	34	30	28	28	28

PRESSURE DROP: (6.0)*(Velocity Head In 8")

MATERIALS OF CONSTRUCTION:
SHELL: DOUBLE WRAP 16 GA CARBON STEEL
HEADS: 3/16" CARBON STEEL

EXTERNAL PAINT: HIGH TEMP BLACK

WEIGHT: 610 LBS.

CERTIFICATION

CUSTOMER: .

CUSTOMER P.O. NO.: .

DATE: . BY: .

No.	REVISIONS	APPR.

MAXIM
SILENCERS, INC.

10635 BRIGHTON LANE
STAFFORD, TEXAS 77477
PHONE (832) 554-0980
FAX (832_ 554-0890

8"MSA4 EXHAUST SILENCER

	DRAWN	TJW	10/28/02	ORDER NO.	DRAWING NO.	REV
	CHECKED			.	STD8MSA4	
	APPROVED			SHEET	Sheet 1 of 1	