


10" INLET AND OUTLET FLANGES  
 1/2" PLATE, 16" O.D.  
 (12) 1" DIA. HOLES  
 ON 14 1/4" B.C. STRADDLE C.L.

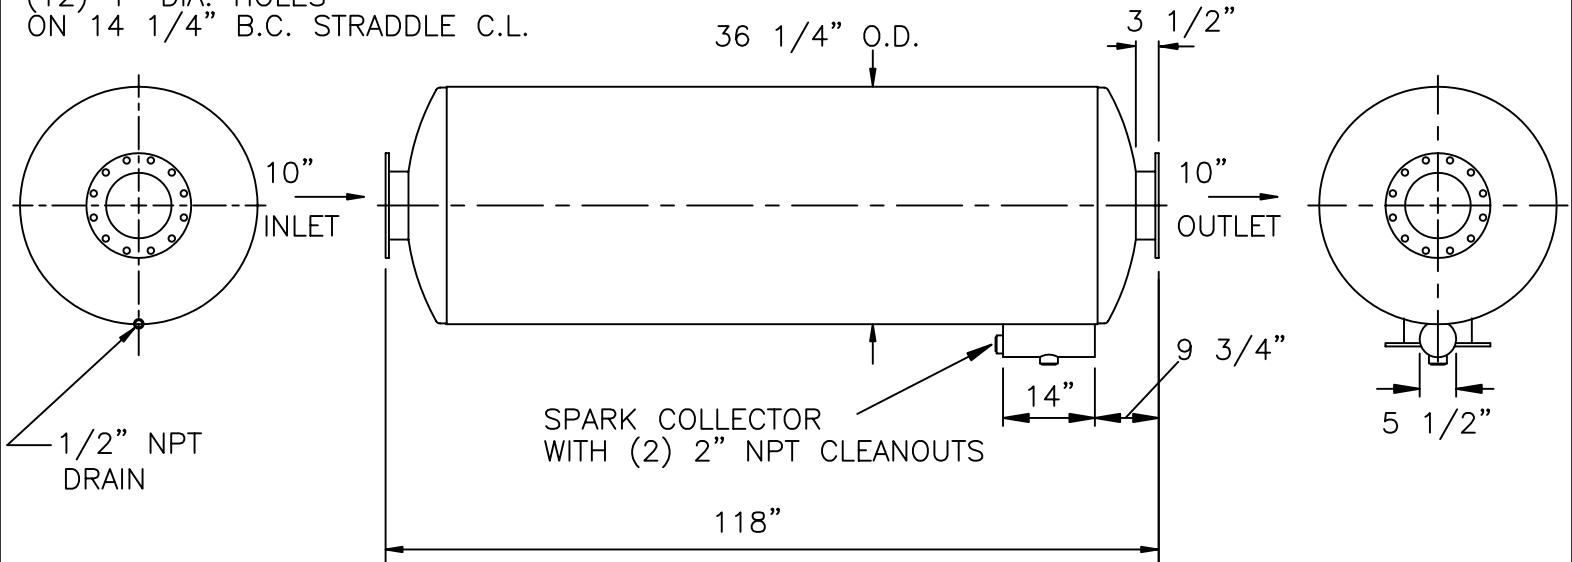

SERVICE: SPARK ARRESTING EXHAUST SILENCER FOR RECIPROCATING ENGINE

OCTAVE BAND	<u>31.5</u>	<u>63</u>	<u>125</u>	<u>250</u>	<u>500</u>	<u>1K</u>	<u>2K</u>	<u>4K</u>	<u>8K</u>
INSERTION LOSS	17	25	35	35	32	29	28	28	29

PRESSURE DROP: (6.0)\*(Velocity Head) IN 10" I.D. DUCT

MATERIALS OF CONSTRUCTION:

SHELL: DOUBLE WRAP 16 GA CARBON STEEL  
 HEADS: 3/16" CARBON STEEL

CERTIFICATION

CUSTOMER: \_\_\_\_\_

CUSTOMER P.O. NO.: \_\_\_\_\_

EXTERNAL PAINT: HIGH TEMP BLACK

WEIGHT: 980 LBS.

DATE: \_\_\_\_\_ BY: \_\_\_\_\_

MAXIM SILENCERS | 10635 BRIGHTON LANE  
 STAFFORD, TX 77477  
 PHONE (832) 554-0980  
 FAX (832) 554-0990

10"MSA4 SPARK ARRESTING EXHAUST SILENCER

DRAWN	TJW	10/25/01	ORDER NO.	DRAWING NO.	REV
CHECKED				STD10MSA4	

No.	REVISIONS	APPR.	APPROVED			Sheet 1 of 1
-----	-----------	-------	----------	--	--	--------------