


INLET AND OUTLET FLANGES:
 1/2" PLATE, 16" 150# DRILLING
 23 1/2" O.D. WITH (16) 1 1/8"Ø
 HOLES ON 21 1/4" B.C.,
 STRADDLE C.L.

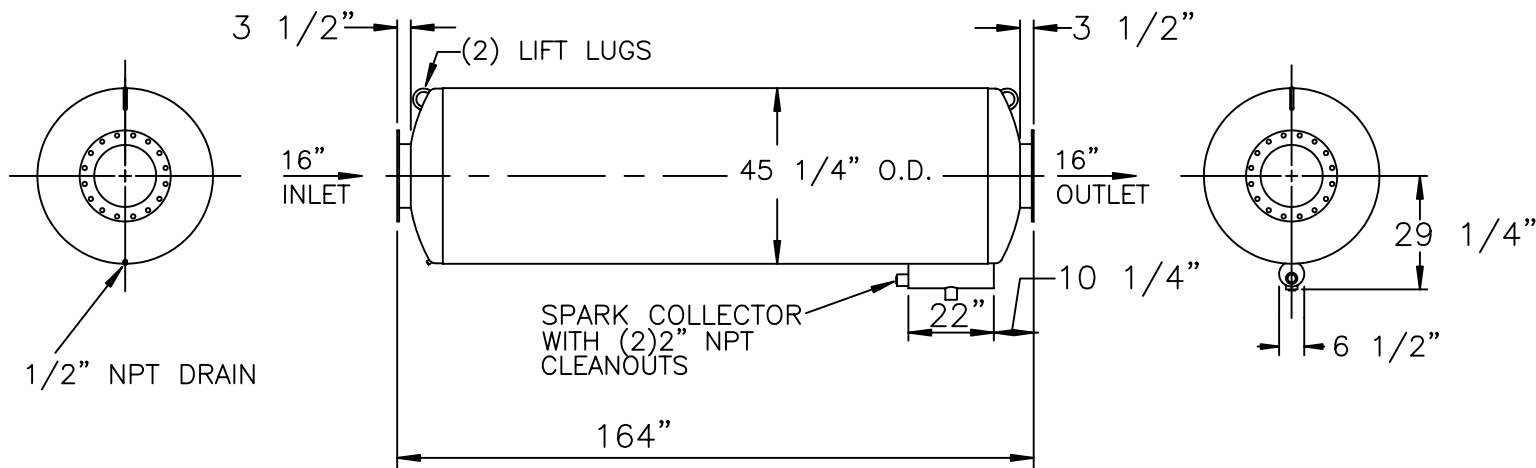

SERVICE : CRITICAL TYPE SPARK ARRESTING EXHAUST SILENCER

OCTAVE BAND	63	125	250	500	1K	2K	4K	8K
INSERTION LOSS	23	35	35	31	28	28	28	29

SILENCER PRESSURE DROP: 6.0* VELOCITY HEAD IN 16" DUCT

MATERIALS OF CONSTRUCTION : CARBON STEEL

SHELL: 10 GA
 HEADS AND BAFFLES: 1/4" F&D
 FLANGES: 1/2" PLATE

EXTERNAL PAINT : HIGH TEMPERATURE BLACK

WEIGHT : 2250 LBS

CERTIFICATION

CUSTOMER: _____

CUSTOMER P.O. NO.: _____

DATE: _____ BY: _____

MAXIM SILENCERS 10635 BRIGHTON LANE
 STAFFORD, TX 77477
 PHONE (832) 554-0980
 FAX (832) 554-0990

16"MSA4 EXHAUST SILENCER

				DRAWN	TJW	2FEB01	ORDER NO.	DRAWING NO.	REV
				CHECKED				STD16MSA4	
No.	REVISIONS	APPR.	APPROVED				SHEET	Sheet 1 of 1	