


10" INLET AND OUTLET FLANGES
 1/2" PLATE, 16" O.D.
 (12) 1" DIA. HOLES
 ON 14 1/4" B.C. STRADDLE C.L.

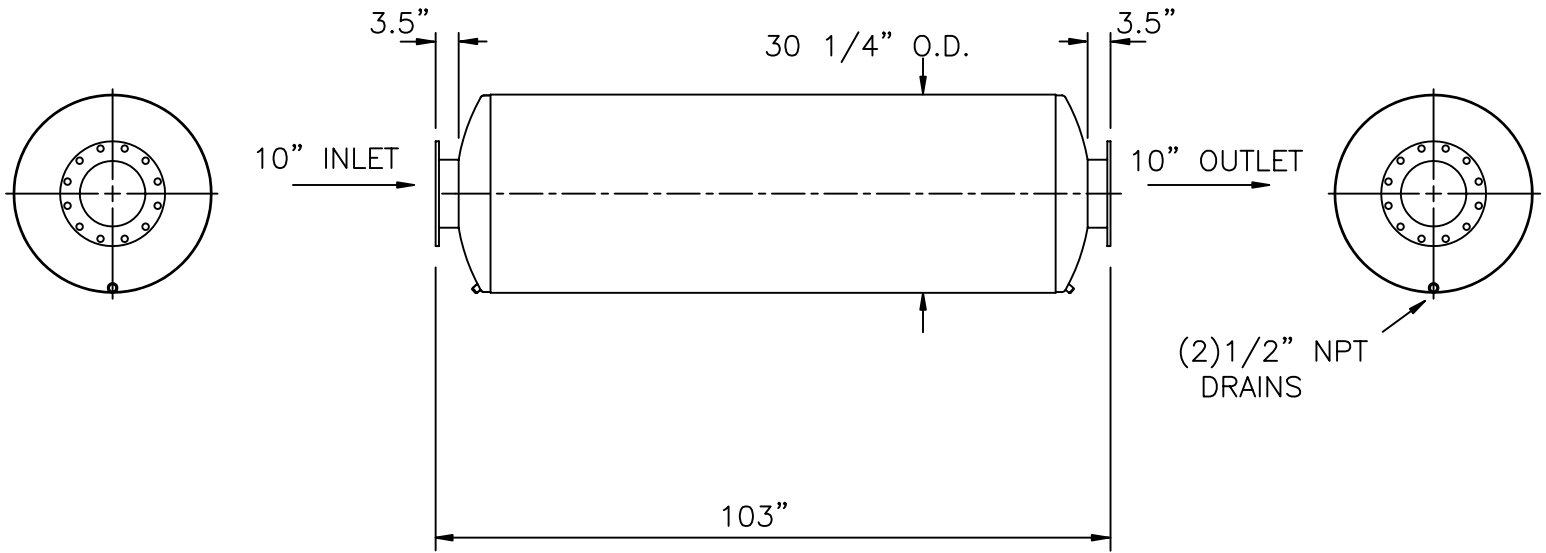

SERVICE: EXHAUST SILENCER FOR RECIPROCATING ENGINE

PRESSURE DROP: $(0.4) \times (\text{Velocity Head In } 10" \text{ Duct})$

| | | | | | | | | |
|----------------|----|-----|-----|-----|----|----|----|----|
| OCTAVE BAND | 63 | 125 | 250 | 500 | 1K | 2K | 4K | 8K |
| INSERTION LOSS | 13 | 25 | 33 | 27 | 17 | 13 | 13 | 13 |

MATERIALS OF CONSTRUCTION :

SHELL: DOUBLE WRAP 16 GA CARBON STEEL
 HEADS: 3/16" CARBON STEEL

CERTIFICATION

CUSTOMER: _____

CUSTOMER P.O. NO.: _____

EXTERNAL PAINT: HIGH TEMP BLACK

WEIGHT: 655 LBS.

DATE: _____ BY: _____

MAXIM SILENCERS

10635 BRIGHTON LANE
 STAFFORD, TX 77477
 PHONE (832) 554-0980
 FAX (832) 554-0990

10" MT41 EXHAUST SILENCER

| | | | | | | | | | |
|-----|-----------|-------|----------|---------|-----|---------|-----------|--------------|-----|
| | | | | DRAWN | TJW | 9/11/01 | ORDER NO. | DRAWING NO. | REV |
| | | | | CHECKED | | | | STD10MT41 | |
| No. | REVISIONS | APPR. | APPROVED | | | | SHEET | Sheet 1 of 1 | |