INLET FLANGE:
1/2" PLATE, 14" 150# DRILLING
21" O.D. WITH (12) 1 1/8"ø
HOLES ON 18 3/4" B.C.,
STRADDLE C.L.

OUTLET FLANGE:
1/2" PLATE, 14" 150# DRILLING
21" O.D. WITH (12) 1 1/8"ø
HOLES ON 18 3/4" B.C.,
STRADDLE C.L.

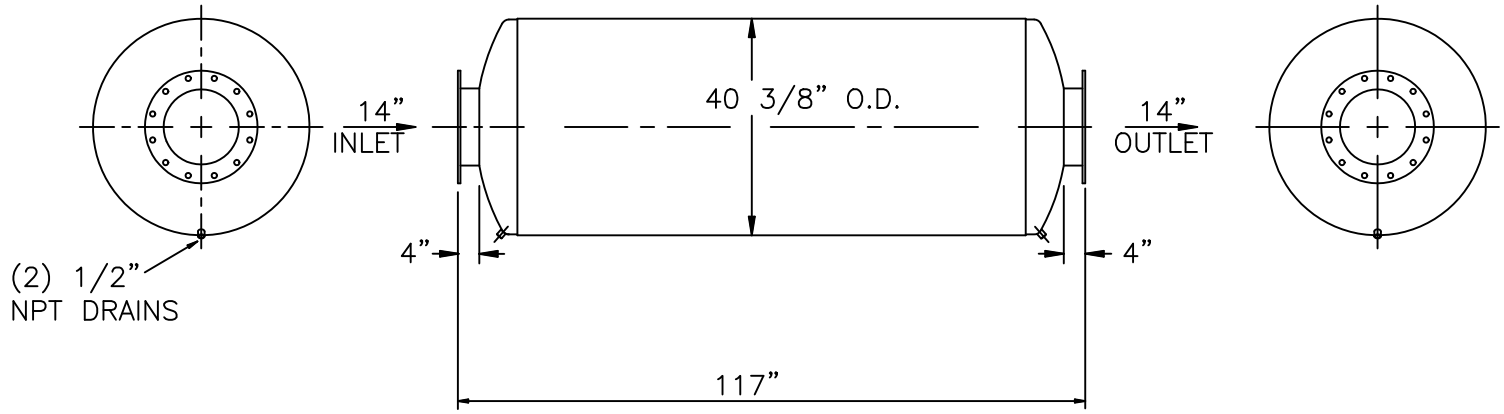

SERVICE: EXHAUST SILENCER FOR RECIPROCATING ENGINE

OCTAVE BAND	63	125	250	500	1K	2K	4K	8K
INSERTION LOSS	14	32	31	22	14	13	13	13

SILENCER PRESSURE DROP: (4.0)*(Velocity Head In 14' I.D. Duct)

MATERIALS OF CONSTRUCTION : CARBON STEEL
SHELL: 3/16"
HEADS AND BAFFLES: 1/4" F&D
FLANGES: 1/2" PLATES

EXTERNAL PAINT : FLAT BLACK, HIGH TEMPERATURE

WEIGHT : 1275 LBS

CERTIFICATION

CUSTOMER: _____

CUSTOMER P.O. NO.: _____ .

. _____

DATE: . _____ BY: _____

No.	REVISIONS	APPR.

MAXIM
SILENCERS, INC.

10635 BRIGHTON LANE
STAFFORD, TEXAS 77477
PHONE (832) 554-0890
FAX (832) 554-0990

14" MT41 EXHAUST SILENCER

			ORDER NO.	DRAWING NO.	REV
DRAWN	DG	5/12/03	.	14MT41_STD	
CHECKED	JJ	5/13/03			
APPROVED				Sheet 1 of 1	