10" INLET AND OUTLET FLANGES
1/2" PLATE, 16" O.D.
(12) 1" DIA. HOLES
ON 14 1/4" B.C. STRADDLE C.L.

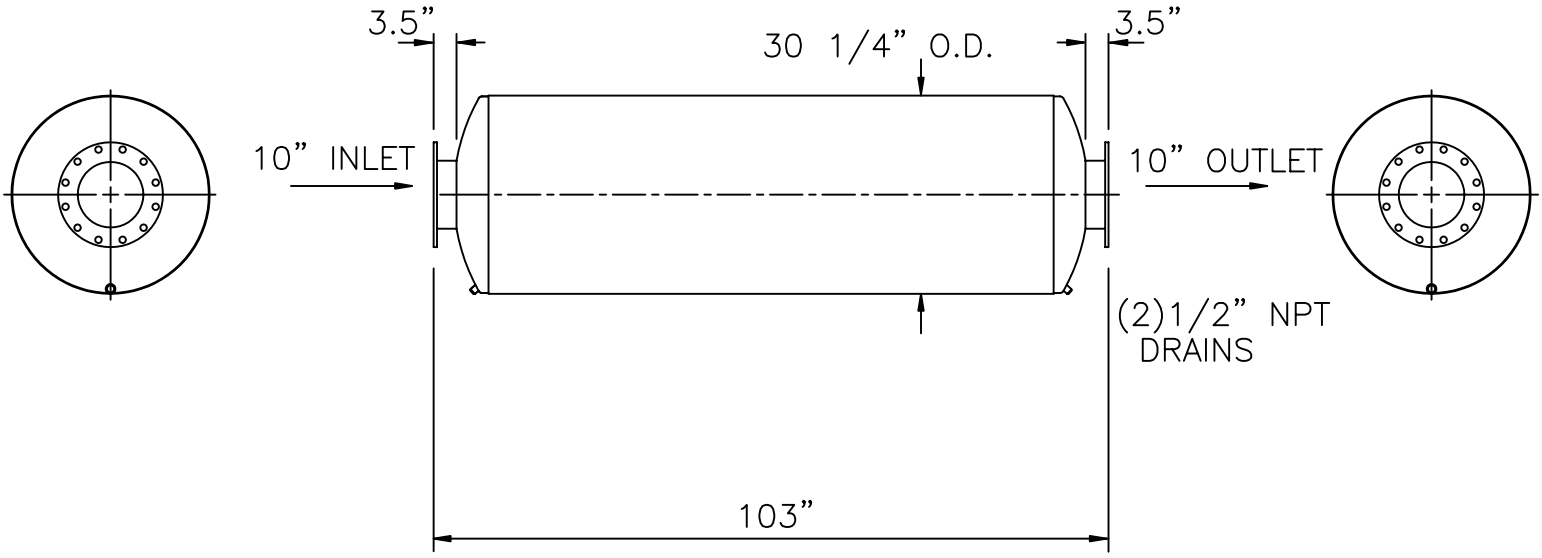

SERVICE: EXHAUST SILENCER FOR RECIPROCATING ENGINE

PRESSURE DROP: 4.0* Velocity Head In 10" Duct

OCTAVE BAND	63	125	250	500	1K	2K	4K	8K
INSERTION LOSS	20	31	35	31	25	23	23	25

MATERIALS OF CONSTRUCTION :

SHELL: DOUBLE WRAP 16 GA CARBON STEEL
HEADS: 3/16" CARBON STEEL

EXTERNAL PAINT: HIGH TEMP BLACK

WEIGHT: 670 LBS.

CERTIFICATION

CUSTOMER: _____

CUSTOMER P.O. NO.: _____

DATE: _____ BY: _____

No.	REVISIONS	APPR.

MAXIM SILENCERS

10635 BRIGHTON LANE
STAFFORD, TX. 77477
PHONE (832) 554-0980
FAX (832) 554-0990

10"M41 EXHAUST SILENCER

DRAWN	TJW	2/26/03	ORDER NO.	DRAWING NO.	REV
CHECKED				STD_10M41	
APPROVED			SHEET	Sheet 1 of 1	