24" INLET FLANGE
5/8"PLATE, 32"O.D.
(20) 1 3/8" DIA HOLES
ON 29 1/2"B.C.,
STRADDLE C.L.

24" OUTLET FLANGE
5/8"PLATE, 32"O.D.
(20)1 3/8" DIA HOLES
ON 29 1/2"B.C.,
STRADDLE C.L.

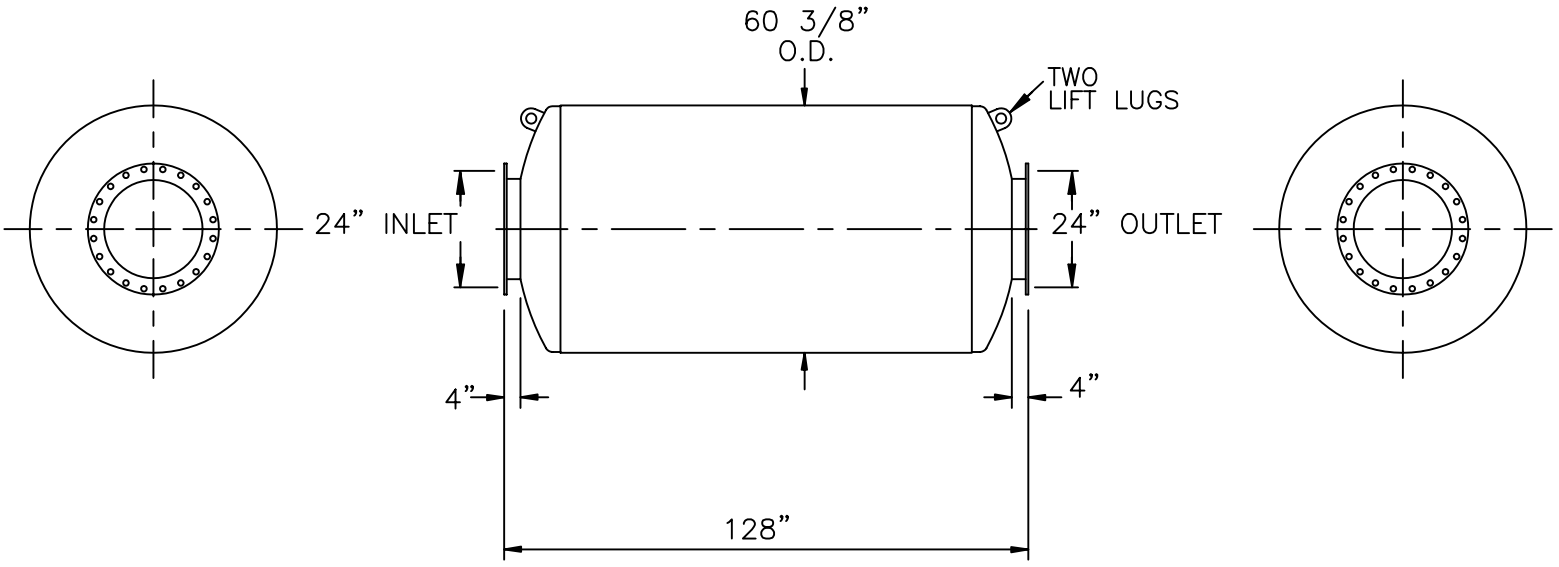

NOTES :

1. SERVICE : EXHAUST SILENCER FOR ENGINE
2. NOISE REDUCTION : 21 DBA

OCTAVE BAND	63	125	250	500	1K	2K	4K	8K
ATTENUATION	16	26	22	12	9	9	9	9

3. SILENCER PRESSURE DROP: (0.4)*(Velocity Head In 24" I.D.Duct)
4. MATERIALS OF CONSTRUCTION :
   SHELL : 3/16" CARBON STEEL
   HEADS AND BAFFLE : 1/4" CARBON STEEL
5. EXTERNAL PAINT : HIGH TEMP. BLACK
6. WEIGHT: 2590 LBS

CERTIFICATION

CUSTOMER: _____

CUSTOMER P.O. NO.: _____

_____

DATE: _____ BY: _____

MAXIM SILENCERS
10635 BRIGHTON LANE
STAFFORD, TX 77477
PHONE (832) 554-0980
FAX (832) 554-0990

24"MT21 EXHAUST SILENCER

No.	REVISIONS	APPR.

DRAWN	TJW	07/10/01	ORDER NO.	DRAWING NO.		REV
CHECKED				STD24MT21		
APPROVED			SHEET			